


Glasfasergewebe K

Reinforcement mesh for alsecco facade systems

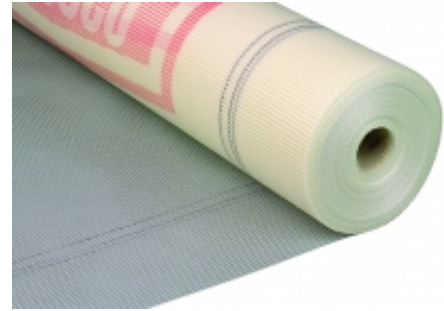

AREAS OF APPLICATION

Reinforcement mesh in undercoat renders, non-slip and alkali-resistant for embedding in render layers consisting of: Armatop A. To be applied when the surfaced is finished with a hard decorative finish

PRODUCT PROPERTIES

- Alkali-resistant
- Great tensile strength
- Non-slip
- Softener free

TECHNICAL DATA

| | |
|----------------------|--|
| Weight per unit area | approx. 160 g/m ² |
| Mesh size | approx. 3,5 x 3,5 mm ² |
| Tensile strength | Warp: ≥ 2000 N/5 cm Weft: ≥ 2000 N/5 cm |

APPLICATION INSTRUCTIONS

| | |
|-------------|---|
| Application | <p>Insert the mesh horizontally or vertically into the open reinforcing compound and level using a smoothing trowel.</p> <p>The ends of the mesh strips must always overlap by at least 10 cm.</p> <p>Embed mesh in the upper third of the reinforcing compound or render layer, full-surface covering with reinforcing compound.</p> |
| Consumption | approx. 1,1 m ² /m ² |

PACKAGING INFORMATION

| | |
|----------------|--|
| Colour | White with "K" marking |
| Packaging unit | Roll 55 m ² , pallet 1.650 m ² |

alsecco GmbH
Kupferstraße 50
D-36208 Wildeck
Phone 03 69 22 / 88-0
Fax 03 69 22 / 88-330
Internet: www.alsecco.de

The above information is based on many years of experience and tests and is provided by us to the best of our knowledge. Such information applies in addition to our application guidelines. However, we cannot accept any responsibility for the correctness of our recommendations on account of wide variety of substrates and of on-site conditions and applications which are outside our control. Any recommendations provided by our employees and deviating from these documents must be given in writing. We reserve right to make any changes on account of technical progress or building regulations. Your technical advisor will be pleased to provide the relevant product data sheets.

