


Panzergewebe

Reinforcement mesh for alsecco facade systems

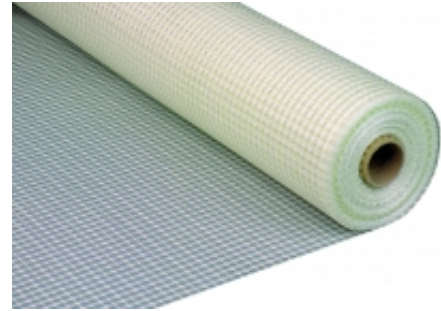

AREAS OF APPLICATION

Mesh for creating particularly impact resistant reinforcement layers.

Application in combination with fibreglass mesh 32, fibreglass mesh universal - Aero, Alsitex Carbon or Alsitex Nova.

PRODUCT PROPERTIES

- Alkali-resistant
- Great tensile strength
- Non-slip
- Softener free

TECHNICAL DATA

Weight per unit area	approx. 330 g/m ²
Mesh size	approx. 6 x 6 mm ²
Tensile strength	Warp: ≥ 3200 N/5 cm Weft: ≥ 3500 N/5 cm

APPLICATION INSTRUCTIONS

Application	Insert mesh into open reinforcing compound horizontally or vertically edge on edge and level using a smoothing trowel. Rework with system fibreglass mesh. Embed mesh in the upper third of the reinforcing compound or render layer, full-surface covering with reinforcing compound.
Consumption	approx. 1,0 m ² /m ²

PACKAGING INFORMATION

Colour	White
Packaging unit	Roll 25 m ² , pallet 750 m ²

alsecco GmbH
Kupferstraße 50
D-36208 Wildeck
Phone 03 69 22 / 88-0
Fax 03 69 22 / 88-330
Internet: www.alsecco.de

The above information is based on many years of experience and tests and is provided by us to the best of our knowledge. Such information applies in addition to our application guidelines. However, we cannot accept any responsibility for the correctness of our recommendations on account of wide variety of substrates and of on-site conditions and applications which are outside our control. Any recommendations provided by our employees and deviating from these documents must be given in writing. We reserve right to make any changes on account of technical progress or building regulations. Your technical advisor will be pleased to provide the relevant product data sheets.

