


Putzabschlussprofil KU

Casing bead profile for ETICS rendering systems and for rendering on concrete and brickwork

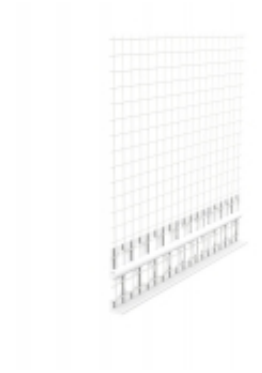

AREAS OF APPLICATION

Rapid and reliable creation of clean edges on rendering.

PRODUCT PROPERTIES

- With integrated mesh strip, approx. 135 mm wide
- UV resistant

TECHNICAL DATA

Material

Plastics

Design

Profile type (mm)	Flange height of profile (mm)
Putzabschlussprofil 3	ca. 3
Putzabschlussprofil 5	ca. 5
Putzabschlussprofil 8	ca. 8
Putzabschlussprofil 10	ca. 10
Putzabschlussprofil 15	ca. 15
Putzabschlussprofil 20	ca. 20

Rod length

2,50 m

APPLICATION INSTRUCTIONS

Application

Fix using the system-specific reinforcement compound before the actual reinforcement for the main area is applied. Apply a first continuous layer of reinforcement compound along the entire width of the casing bead profile, then use a trowel to embed and smooth over the plastic profile and the mesh strip in the freshly applied reinforcement compound. When the reinforcement layer is applied, take the system mesh right up to the lower edge of the casing bead profile.

If using Kratzputz A scratch coat, fix the profile in position after the reinforcement layer has been applied to the main area.

Align plumb and flush with the surface, then use a trowel to embed and smooth over. Skim textured renders across the finishing edge.


Please note:

The finishing edge of the plastic profile represents the border and remains visible when the work has been completed. The projection on the profile must be selected so that no protruding edge is left once the base-coat and top-coat renders have been applied.

Information about the weather

The application temperature must not fall below 5 °C and must not exceed 30 °C.

SKETCHES

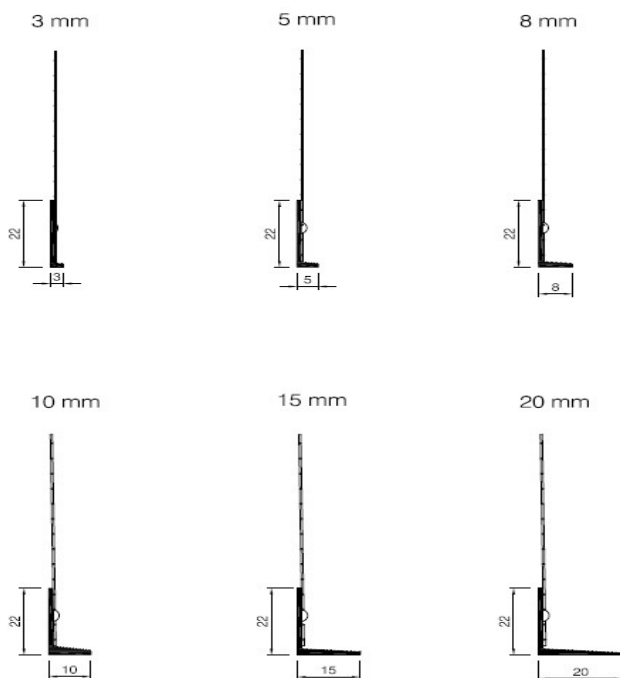

STORAGE

Store dry and in a level position

PACKAGING INFORMATION

Colour	White
Packaging unit	Please also refer to the current product range

OTHER INFORMATION

Transportation	Not a hazardous material
----------------	--------------------------

alsecco GmbH
Kupferstraße 50
D-36208 Wildeck
Phone 03 69 22 / 88-0
Fax 03 69 22 / 88-330
Internet: www.alsecco.de

The above information is based on many years of experience and tests and is provided by us to the best of our knowledge. Such information applies in addition to our application guidelines. However, we cannot accept any responsibility for the correctness of our recommendations on account of wide variety of substrates and of on-site conditions and applications which are outside our control. Any recommendations provided by our employees and deviating from these documents must be given in writing. We reserve right to make any changes on account of technical progress or building regulations. Your technical advisor will be pleased to provide the relevant product data sheets.

