


# Alsitape Kellenschnitt

Weatherproof and UV resistant EPDM tape with groove and rear adhesive strips, to separate render joints, in particular for thick coated alsecco render systems.

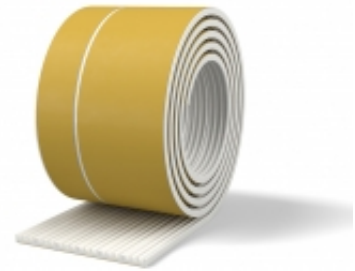

## AREAS OF APPLICATION

Weatherproof and UV resistant EPDM tape to separate render joints on compressive strengths to other components.

## PRODUCT PROPERTIES

- Ozone-resistant
- Self-adhesive
- Weatherproof and UV resistant
- Resistant to condensation

## TECHNICAL DATA

|                                   |  |
|-----------------------------------|--|
| Mortar category                   | Closed-cell EPDM cellular rubber with synthetic rubber adhesive on the rear side |
| Dimensions                        | Width: 54 mm<br>Thickness: 3 mm  |
| Temperature-resistance, permanent | from -30°C to +70°C  |
| Shore hardness                    | 50-60 Shore  |
| Compression set                   | max. 70 %  |
| Water absorption                  | max. 1 %   |

## APPLICATION INSTRUCTIONS

|                         |   |
|-------------------------|---|
| Substrate pre-treatment | All substrates must be stable, level and free of any residue, which can reduce adhesiveness.  |
| Application             | Cut Alsitape joint tape to the required length.<br>If necessary, the tape can be separated into an 18 mm and 36 mm wide strip or separated as needed in a longitudinal direction flush along the groove.<br>Remove self-adhesive film and adhere the Alsitape joint tape flush. |

The render system is then rendered to the tape.

Overlaying areas of the tape can be cut flush along the groove and be subsequently removed after the finishing coat has hardened.

The required driving rain resistant connection to the joint sealing tape between insulation and Alsitape joint tape must be made in any case.

## STORAGE

Dry, cool, protected against sunlight and moisture.

## PACKAGING INFORMATION

Colour White

## OTHER INFORMATION

Transportation Not a hazardous material

General information As a basic principle, a trial bonding should be conducted.

**alsecco GmbH**  
Kupferstraße 50  
D-36208 Wildeck  
Phone 03 69 22 / 88-0  
Fax 03 69 22 / 88-330  
Internet: [www.alsecco.de](http://www.alsecco.de)

The above information is based on many years of experience and tests and is provided by us to the best of our knowledge. Such information applies in addition to our application guidelines. However, we cannot accept any responsibility for the correctness of our recommendations on account of wide variety of substrates and of on-site conditions and applications which are outside our control. Any recommendations provided by our employees and deviating from these documents must be given in writing. We reserve right to make any changes on account of technical progress or building regulations. Your technical advisor will be pleased to provide the relevant product data sheets.

